

HP Vicious Blue



HP Vicious Blue

Specially developed for machining hardness materials up to 60HRC

Very high heat resistance


Hot hardness

Very high oxidation resistance (>1,100°C)

Low thermal conductivity

HP Vicious Blue was developed for milling and drilling high hardened steels from 54HRC to 60HRC. Suitable for dry and wet machining.

Nano-layered Coating Structure

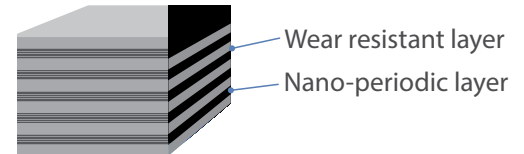

Composition	Color	Structure	Hardness (GPa)	Thickness (μm)	Oxidation Temperature (°C)	Coefficient of Friction	Surface Roughness (Ra)	Properties	Application
AlTiSi Based	Spectral Blue	Nanolayer	41 GPa	2 ~ 3.2 μm	1,100°C	0.3	0.10 ~ 0.25	Very high heat resistance and high abrasion resistance.	Drilling and milling high hardened steels from 54HRC to 60HRC. Suitable for dry/wet machining.

Heat Resistance	High Adhesion	Surface Roughness	Wear Resistance	Welding Resistance	Toughness
◎	◎	○	◎	◎	◎

P					H					M	K		N			S			-
Carbon Steel			Alloy Steel	Tool Steel	Pre-Hardened Steel Hardened Steel					Stainless Steel	Cast Iron	Ductile Cast Iron	Copper Alloy	Aluminum Alloy	Plastic	Titanium Alloy	Heat Resistant Alloys	Inconel	Graphite
C ~0.25%	C0.25% ~0.45%	C 0.45% ~	SCM	SKD SKS	~ 35 HRC	35 ~ 45 HRC	45 ~ 50 HRC	50 ~ 60 HRC	60 ~ 70 HRC	SUS	GG	GGG	Cu	AL	-	Ti			-
			○		○	○	◎	◎			◎	◎							

◎ Excellent ○ Good



PrimusCoating

PrimusCoating Vietnam


C_1B-C6_B, Lot C_1B_CN, KCN My Phuoc 3, IP
Thoi Hoa Ward, Ho Chi Minh City, Viet Nam 75951
Phone: +84 27438 03477
raman@primcoat.com

Sales Team:

Mr. Tuan - Sales Manager
Phone: +84 977976164
tuan@primusvietnam.com

Mr. Huy - Sales Engineer
Phone: +84 977976790
sales1@primusvietnam.com

Scan to access our website
www.primuscoating.com



PC/ET-0926-ViciousBlue

PRIMUS COATING VIETNAM